

A study in integrity of an RFID-monitoring HMSC

Ahmed Mohammed^{a*}, Qian Wang^a, Xiaodong Li^b

^a *School of Engineering, University of Portsmouth, Portsmouth, Hants, UK, PO1 3DJ*

^b *Department of Mathematics, University of Portsmouth, Portsmouth, Hants, UK, PO1 3HF*

***Corresponding author** (*School of Engineering, University of Portsmouth, Portsmouth, Hants, UK, PO1 3DJ e-mail: ahmed.mohammed@port.ac.uk*)

ABSTRACT

In recent years, trade of Halal food has been spreading at a rapid pace. Meantime, Halal food consumers are increasingly concerned about the integrity of Halal-food related products in terms of production, transportation and storage along an entire supply chain network as it is important for Halal food products these consumers purchase from supermarkets are truly Halal. Unlike non-Halal food, this requires Halal food suppliers who are able to monitor a Halal food supply chain network providing adequate information of Halal food sold in supermarkets and these information data can also be easily accessed by Halal food consumers. This paper presents a framework in development of an RFID-enabled monitoring system for a Halal meat supply chain (HMSC) network design for enhancing traceability of integrity of Halal meat products. A multi-objective model was developed and used for investigating **an** economic feasibility of the proposed RFID-enabled monitoring system and it was validated through a case study. **Keywords:** 2G-RFID, Halal, supply chains, optimization, design.

INTRODUCTION

Consumption of Halal food is a well-known diet among Muslim and many non-Muslim people. Production and supply of Halal meat products is one of fast-growing businesses

around the world. The Islamic term of Halal means “allowed or permitted” in English translation and it is often used in association with food, i.e., food that is permissible under the Islamic Shari’ah (laws) for Muslims to eat or drink. It also specifies a number of criteria that direct people as to how food should be prepared in a Halal way. For instance, production and transportation of Halal meat products need to comply with the Islamic Shari’ah, and this should be applied to all sectors including each process of livestock feeding, slaughtering, transporting, packing and storing before being sold in supermarkets. If a specific process of HMSCs (Halal meat supply chains) is not handled properly in a Halal way, retailers or consumers may regard these products as non-Halal. As a result of this, there is a desire for Halal meat consumers who increasingly demand more transparent information relating to the integrity of Halal meat products they purchase in supermarkets.^[1] Halal integrity refers to a food product that remains Halal from a upstream to downstream of a food supply chain free from any activities that might breach the Halal status intentionally or unintentionally.^[2] Nevertheless, a survey by authors indicates that there are a number of concerns from Halal food consumers about the integrity of Halal meat products sold in supermarkets. These include periodic records in livestock feeding and growing history in farms, slaughtering processes at abattoirs and Halal meat transportation from abattoirs to retailers. However, these issues are often overlooked by researchers in this field.^[2,3]

There are a few preliminary publications in studies on traceability of Halal meat products. Mansor,^[4] proposed a method for checking meat colors to determine if the slaughtered poultry is handled properly in the Halal way. Junaini and Abdullah,^[5] suggested a mobile Halal product verification method on which information of a Halal product can be sent to a customer’s mobile phone using the camera phone barcode scanning technique. Shanahan,^[6] proposed an RFID-based framework for improving the traceability of cattles at farms and abattoirs where each cattle’s ear is attached with an RFID tag. Kassim,^[7] synthesized a similar system using mobile applications that allow customers to check Halal product information directly on their mobile phones. Bahrudin,^[8] developed a tracking system using RFID technology for enhancing Halal product integrity. Feng,^[9] developed a traceability system by integrating RFID applications into a personal digital assistant

(PDA), which is a handheld PC used by operators at beef segmentation sections to collect data and print out information in a form of barcode label attached with each pack of segmented beef. Similar studies on beef traceability were reported.^[10-14]

There were many studies using RFID techniques for improving traceability in ensuring safety and/or originality of food products provided in supply chain sectors. Expósito,^[15] developed an RFID-based monitoring system used for tracing a wine supply chain. The developed system collects data of the meteorological and botanical information associated with the used grapes using RFID tags that are attached to grape boxes; the system sends collected data to a central server via a General Packet Radio Service (GPRS) system. These information data can also be accessed online by consumers. Barge,^[16] describes an item-level traceability system for cheese products in a dairy factory as each piece of cheese is attached with an RFID tag containing cheese identifications such as cheese type, production date and expiry date. Similar studies were reported.^[17-20] In order to identify the origin of agricultural products, Sun,^[21] developed an anti-counterfeit RFID-GPS system in which Global Positioning System (GPS) data and encrypted Chinese-sensible codes were applied. The system was used to collect data of location and the weight of the agricultural products and print the anti-counterfeit labels in associated with sold products. The collected data is encrypted/decrypted using AES (Advance Encrypted Standard) algorithm with a different cipher code. Jedermann,^[22] developed a smart-container that can monitor the freshness of fruits during transportation using a combination of RFID sensors, sensor networks and software agents. Zhang,^[23] introduced an RFID-based system that can improve traceability of frozen foods in terms of food temperatures and arrival times during storage and transportation using RFID sensors, GPS and mobile applications. Chen,^[24] proposed a new type of RFID application namely 2G-RFID-Sys using the Internet of Things (IoT) technology with RFID sensor tags (semi-passive tags integrated with sensors) that can monitor food temperatures in a refined smart cold supply chain. Wang,^[25] presented a real-time online monitoring decision supporting system which can monitor quality of perishable products providing drivers with suggestions as to how to cope with an abnormality when an alert is triggered during transportation in order to reduce losses of perishable products.

To cope with the increasing demand for the Halal meat products that are produced according to the Islamic Law, a HMSC monitoring system is needed for improving the traceability of Halal meat integrity. This paper presents a framework in development of an RFID-enabled HMSC network for enhancing traceability in terms of integrity of Halal meat products to be sold in supermarkets. Nevertheless, such an integrated system is subject to additional costs for RFID system implementation and return of investment (ROI), which also need to be investigated. To this aim, a multi-objective mathematical model was developed and used for examining the economic feasibility of the proposed RFID-enabled HMSC network in order to obtain a trade-off decision within three conflicting objectives.

THE PROPOSED 2G-RFID-ENABLED HMSC

Figure 1 illustrates the architecture of a simplified RFID-enabled HMSC for monitoring each process of Halal meat production and transportation. The proposed RFID-enabled monitoring HMSC consists of farms, abattoirs, transporters, retailers and consumers as described below:

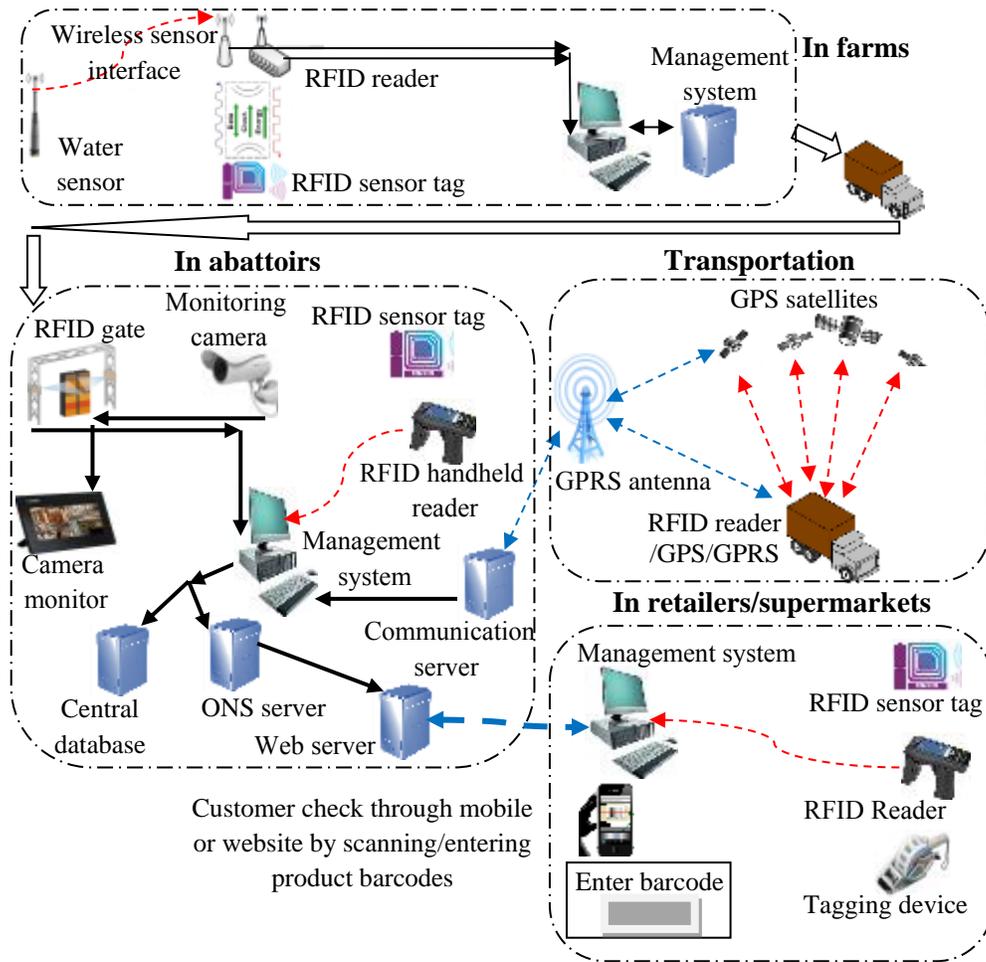


Fig. 1. Architecture of the proposed RFID-based monitoring HMSC network.

In farms: Each livestock is attached with a 2G-RFID (second-generation RFID) sensor tag which can store both passive and active information. The 2G-RFID sensor tag is capable of transmitting information data in the relevance to not merely a unique identification code of an attach livestock but also its health status such as heartbeats and body temperatures. Information data are collected by wireless RFID readers that interrogate RFID-sensor tags by emitting radio signals and subsequently RFID sensor tags respond by sending information data to RFID readers. The gathered information data by RFID readers are sent to a host computer management system. Water supply for each livestock is monitored by a water sensor mounted on a water basin. When contaminated water is detected by a water sensor, it sends an alert to the computer management system for records and farmers ought

to isolate those contaminated livestock immediately from others. Periodically, farmers should also take a medical record of livestock relating to illnesses, medical treatments and treatment results during the growing period. The record should include information of given medical treatments and vaccination that do not contain pork enzymes which make livestock as non-Halal. The growing history of each livestock needs to be input into the computer management system manually. All the collected information data will be analyzed and displayed as shown in Table 1 allowing traders and consumers to check relevant information in terms of the integrity of Halal meat products they purchase in farms or supermarkets by either entering product codes online or scan them using their smart mobile phones.

Table 1
Growing history of a livestock in farms.

Info category	Info details
Category	Beef
Feeding methods	Halal
Types of diseases /symptoms	Bovine Ephemeral Fever
Treatment duration	4 days
Treatment results	Healed
Growing History/Kg	10Kg/8mth
Enzyme History	None
Last Update of Info	11/02/15

In abattoirs: Because each livestock is attached with a 2G-RFID tag, once these transported livestock from farms enter into abattoirs through an RFID-reader mounted gate, information data of each livestock will be collected and stored automatically in an abattoir database. To comply with the Halal slaughtering process,^[26] slaughtering places must be

monitored by abattoir operators through installed cameras. If a livestock is not slaughtered according to the Hahal way, this livestock needs to be isolated and marked as non-Halal. At the end of the slaughtering process, each segmented meat is packed and tagged with a new 2G-RFID sensor tag that is used for monitoring its pH values; a typical pH value for meats ranges from 4.8 to 5.8.^[27] The information data can be collected by an RFID handheld reader and the collected information data are subsequently sent back to the abattoir database.

Table 2

Information of a packed meat product at abattoirs to be sold at retailers or supermarkets.

Info category	Info details
Meat type	Beef
Origin of meat	Scotland
Slaughtering date	12/08/14
Slaughterer Name	Omar
Arrival date to the shop	13/08/14

In transportation: Figure 2 illustrates the architecture of the proposed monitoring system during transportation of Halal meat products from abattoirs to retailers. Each container of a lorry is equipped with an RFID reader, a temperature sensor, a GPS and a GPRS system. The RFID reader is used for collecting identification information as well as pH values from 2G-RFID sensor tags, which are attached with each of packed Halal meat products in the lorry. The GPS is used for tracking locations of the lorry sporadically providing an estimated arrival time to retailers. A temperature sensor continuously detects container's temperatures and sends an alert to notify drivers if the temperature reaches the upper limit. Information data collected by an RFID reader and a GPS are sent back to the abattoir management system over a GPRS network that consists of a GPRS transmitter, an antenna and a receiver. These data can be retrieved by retailers. GPRS rather than GSM (global

system for mobile) was selected as its active transmission can share available resources. Also, it uses a packet switch technique allowing an allocation of resources when needed; furthermore, it provides a data transfer rate up to 172 kbps. Figure 3 shows data transmission flow throughout the transportation monitoring process.

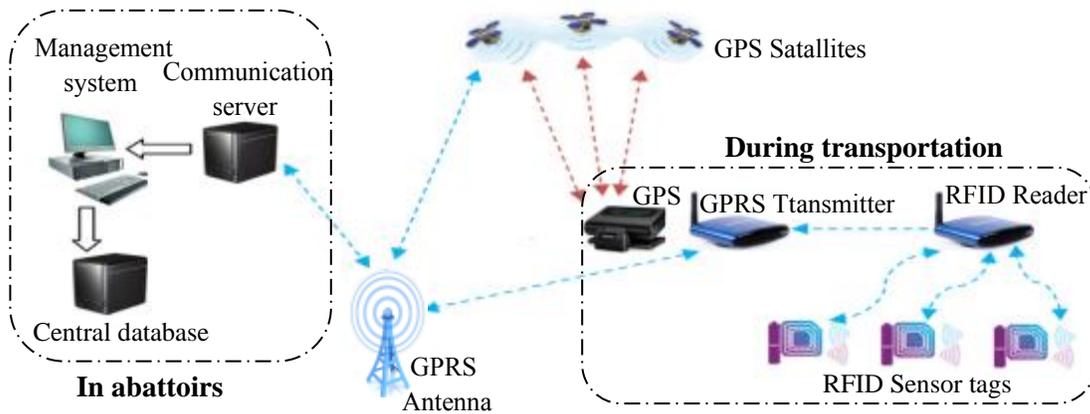


Fig. 2. The transportation monitoring system.

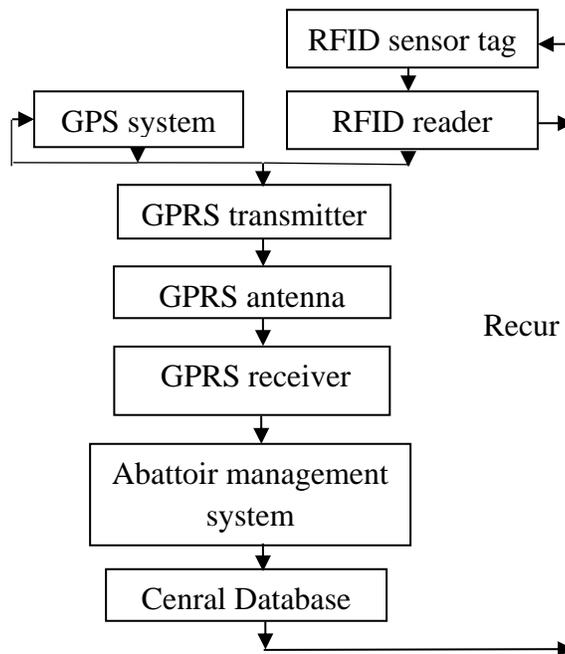


Fig. 3. Data flow of the transportation monitoring process.

In retailers or supermarkets: Once packed meats from abattoirs arrive at a retailer or a supermarket, each packed meat is scanned by a handheld RFID reader to collect information data that are subsequently uploaded into an inventory management system at the retailer or the supermarket. Meat in each package may then be sliced and repacked in smaller sizes and each re-packed meat is tagged with a barcode label that contains relevant information of the packed meat product as shown in Table 2, which can be accessed by consumers entering barcodes online or using a mobile scanner.

Figure 4 shows a flowchart that illustrates a complete monitoring process during Halal meat production (at farms and abattoirs), transportation and in retailers. Table 3 shows the corresponding operations (or actions) that may be taken into account in order to maintain the integrity of Halal meat throughout the proposed HMSC network.

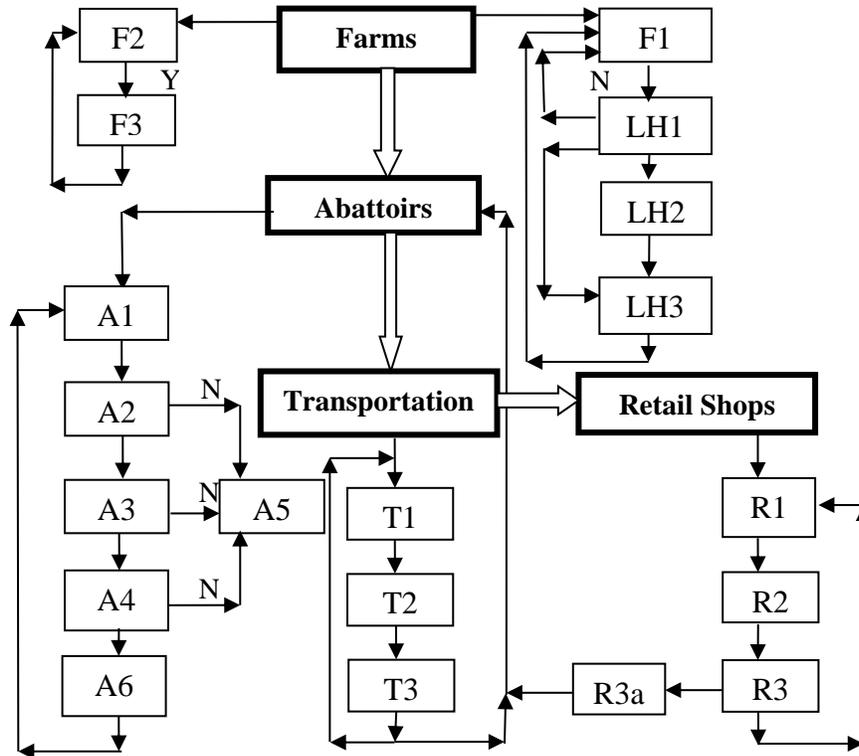


Fig. 4. The Halal-monitoring process of a HMSC.

Table 3

The corresponding operations or actions of a HMSC monitoring process shown in Figure 4.

Operations	Description
Fx	Farms
F1	Each livestock is attached with an RFID tag.
F2	A water sensor is installed at each water basin to detect water contamination; the water sensor sends an alert to the management system if water is contaminated at the water basin.
F3	Identify and separate the livestock watered by the contaminated water basin.
LHx	
LH1	Record any disease of a livestock by entering medical information data into the computer management system.
LH2	Identify and separate the infected livestock.
LH3	Update the management system by entering types of diseases and results of treatments of the infected livestock.
Ax	Abattoirs
A1	Receive inventory data of RFID-tagged livestock through an RFID-reader mounted gate at an abattoir.
A2	Monitor the Halal slaughtering process by operators through cameras to ensure that each livestock is slaughtered with absence of other livestock at a slaughtering station.
A3	Knife must be invisible to each slaughtered livestock.
A4	Each slaughtered livestock's head is held at a certain position for 25 seconds to allow draining contaminated blood.
A5	Separate and mark each slaughtered livestock as non-Halal if the slaughtering process does not follow steps A2-4.

A6	Attach each slaughtered livestock with an RFID sensor tag for monitoring meat quality during transportation; collect its information data by an RFID handheld reader.
Tx	Transportation
T1	Monitor container temperatures and products' pH values by a temperature sensor and RFID sensor tags respectively and send an alert to notify drivers if any of these values reach above the upper limit.
T2	Transmit data collected from GPS and RFID readers to the abattoir management system via a GPRS system.
T3	Identify, separate and return any stale meat to the abattoir.
Rx	Retailers
R1	Operators unload arrived meats into stores of a retailer, scan RFID tags by a handheld RFID reader for acquisition of inventory data.
R2	Segment and repack meats in small packages tagged with barcode labels ready for sales.
R3	Consumers can check information of Halal meat integrity by scanning product barcodes using a mobile scanner or entering barcodes online.
R3a	Retailers return non-Halal meat products to abattoirs.

MULTI-OBJECTIVE MATHEMATICAL MODEL

There are a number of similar studies in optimization of supply chains design using multi-objective approaches. Amin and Zhang,^[28] created a mixed integer linear programming model aiming to minimize the total cost for multiple locations in a closed-loop supply chain network. Kannan,^[29] developed a genetic algorithm method for seeking a solution in minimization of total costs for a closed-loop supply chain. Lee and Dong,^[30] presented a stochastic model for managing a supply chain with three objectives including costs of facility location, path selection and transportation. Pishvae and Razmi,^[31] established a multi-objective fuzzy model for optimizing a green supply chain design in minimizing total

cost and environmental impact. Mohammed and Wang,^[32] developed a multi-objective possibilistic programming approach for a distribution-planning problem of a meat supply chain.

In this study, a mathematical model with three conflicting objectives was developed for investigating the economic feasibility of the proposed RFID-enabled HMSC in order to obtain a cost-effective decision. The first objective Z_1 is aimed at minimizing the total investment cost. The second objective Z_2 is aimed at maximizing the Halal meat integrity in the number of Halal meat products. And the third objective Z_3 is aimed at maximizing ROI (return of investments). Sets, parameters, variables and notations are described as follows:

Sets:

I	set of farms $i \in I$
J	set of abattoirs $j \in J$
K	set of retailers $k \in K$

Parameters:

$C_i^{E,\alpha}$	RFID equipment (E) cost (GBP) required for farm i
$C_i^{E,\beta}$	RFID equipment (E) cost (GBP) required for abattoir j
$C_i^{I,\alpha}$	RFID implementation (I) cost (GBP) required for farm i
$C_j^{I,\beta}$	RFID implementation (I) cost (GBP) required for abattoir j
$C_{ij}^{T,u}$	unit transportation (T) cost (GBP) per mile from farm i to abattoir j
$C_{jk}^{T,v}$	unit transportation (T) cost (GBP) per mile from abattoir j to retailer k

d_{ij}^u	travel distance (mile) from farm i to abattoir j
d_{jk}^v	travel distance (mile) from abattoir j to retailer k
W	transportation capacity (units) per vehicle
S_i^α	maximum supply capacity (units) of farm i
S_j^β	maximum supply capacity (units) of abattoir j
D_j^β	minimum demand (in units) of abattoir j
D_k	minimum demand (in units) of retailer k
P_{ij}^u	integrity percentage through first transportation link u from farm i to abattoir j
P_{jk}^v	integrity percentage through second transportation link v from abattoir j to retailer k
R_i^α	return of investment (GBP) per item for farm i
R_j^β	return of investment (GBP) per item for abattoir j

Variables:

x_{ij}^u	quantity of units transported through the first transportation link u from farm i to abattoir j
x_{jk}^v	quantity of units transported through the second transportation link v from abattoir j to retailer k
y_i^α	$\left\{ \begin{array}{l} 1: \text{if farm } i \text{ is open} \end{array} \right.$

0: otherwise

$$y_j^\beta \begin{cases} 1: \text{if abattoir } j \text{ is open} \\ 0: \text{otherwise} \end{cases}$$

To minimize the total investment cost Z_1 , which consists of equipment costs, implementation costs and transportation costs, it is given by:

$$\begin{aligned} \text{Min } Z_1 = & \sum_{i \in I} (C_i^{E,\alpha} + C_i^{I,\alpha}) y_i^\alpha + \sum_{j \in J} (C_j^{E,\beta} + C_j^{I,\beta}) y_j^\beta \\ & + \sum_{i \in I} \sum_{j \in J} C_{ij}^{T,u} [x_{ij}^u / W] d_{ij}^u + \sum_{j \in J} \sum_{k \in K} C_{jk}^{T,v} [x_{jk}^v / W] d_{jk}^v \end{aligned} \quad (1)$$

To maximize integrity of Halal meat products Z_2 is the main objective of the RFID-based monitoring HMSC network, it is given by:

$$\text{Max } Z_2 = \sum_{i \in I} \sum_{j \in J} P_{ij}^u x_{ij}^u + \sum_{j \in J} \sum_{k \in K} P_{jk}^v x_{jk}^v \quad (2)$$

Return of investment (ROI) Z_3 is one of three objectives that need to be considered. To maximize ROI, it is given by:

$$\text{Max } Z_3 = \sum_{i \in I} \sum_{j \in J} R_i^\alpha x_{ij}^u + \sum_{j \in J} \sum_{k \in K} R_j^\beta x_{jk}^v \quad (3)$$

Subject to

$$\sum_{i \in I} x_{ij}^u \leq S_i^\alpha y_i^\alpha \quad \forall j \in J \quad (4)$$

$$\sum_{k \in K} x_{jk}^v \leq S_j^\beta y_j^\beta \quad \forall j \in J \quad (5)$$

$$\sum_{i \in I} x_{ij}^u \geq D_j^\beta \quad \forall j \in J \quad (6)$$

$$\sum_{j \in J} x_{jk}^v \geq D_k^\gamma \quad \forall k \in K \quad (7)$$

$$D_j^\beta \geq \sum_{k \in K} x_{jk}^v \quad \forall j \in J \quad (8)$$

$$x_{ij}^u - integer \quad (9)$$

$$x_{jk}^v - integer \quad (10)$$

$$y_i^\alpha - binary \quad (11)$$

$$y_j^\beta - binary \quad (12)$$

Where constraints 4-5 are supply constraints in quantity and constraints 6-8 are demand constraints in quantity.

THE SOLUTION METHODOLOGY

The Optimization approach

In order to obtain Pareto optimal solution, a solution approach was developed. This approach transforms the multi-objective model into a single-objective model (Z_s) which is formulated by considering each objective individually. This single-objective model aims to minimize the scalarized differences between each objective and its optimal value. Undesired deviations (Z_d) are proposed to be subtracted from Z_s with the aim to achieve more accurate objective values. These values are close enough to non-inferior optimal solutions which lead to a clear insight of a compromise solution between conflicting

objectives for decision makers. The solution approach function (Z) can be formulated as follows:

$$\text{Min } Z = Z_s - Z_d \quad (13)$$

Where

$$Z_s = \left[(w_1 \mu_1) - (w_2 \mu_2) - (w_3 \mu_3) \right] \quad (14)$$

$$\text{s.t. } \begin{cases} \mu_1 = \left[\frac{Z_1 - Z_1^*}{Z_1^*} \right] \\ \mu_2 = \left[\frac{Z_2 - Z_2^*}{Z_2^*} \right] \\ \mu_3 = \left[\frac{Z_3 - Z_3^*}{Z_3^*} \right] \\ 0 \geq w_n \geq 1 \quad n = (1, 2, 3) \\ \sum_{n=1}^3 w_n = 1 \end{cases} \quad (15)$$

Set $w_n^* = \frac{w_n Z_n^*}{Z_n^* - Z_n}$, then

$$\begin{aligned} Z_d &= w_1^* Z_1 + w_2^* Z_2 + w_3^* Z_3 \\ &= \frac{w_1 Z_1^*}{Z_1^* - Z_1} Z_1 + \frac{w_2 Z_2^*}{Z_2^* - Z_2} Z_2 + \frac{w_3 Z_3^*}{Z_3^* - Z_3} Z_3 \end{aligned} \quad (16)$$

Finally, based on the aforementioned procedures the solution objective function can be written as follows.

$$\begin{aligned} \text{Min } Z &= (w_1\mu_1 - w_2\mu_2 - w_3\mu_3) \\ &- \left(\frac{w_1 Z_1^*}{Z_1^* - Z_1} Z_1 + \frac{w_2 Z_2^*}{Z_2^* - Z_2} Z_2 + \frac{w_3 Z_3^*}{Z_3^* - Z_3} Z_3 \right) \end{aligned} \quad (17)$$

The constraints contain equations (4)-(10) and (15). Utilizing this approach yields a mono objective function, mixed integer linear programming model which can be solved using a linear programming solver i.e., LINGO or Xpress.

Decision making algorithm

Once the Pareto optimal solutions are obtained, it needs to determine one optimal solution used for implementation. The selected solution can be made by decision makers with the highest degree of preference of the related objectives. So far, several approaches have been employed aiming to select the best trade-off decision in a multi-objective problem. In this paper, a new decision making algorithm was developed and used to select the best solution from the derived Pareto set. The selected solution is subject to the highest superiority value S which is determined by a summation of the minimum distance to the ideal solution Z^+ and the maximum distance to the worse solution Z^- . The selection formula can be expressed as follow:

$$S = \sum_{i=1}^l |Z_i - Z_i^+| + \sum_{i=1}^l |Z_i - Z_i^-| \quad (18)$$

Application and Evaluation

In order to examine the applicability of the developed mathematical model as well as the usefulness of the developed solution methodology, two case studies were applied based on data shown in Table 4. The data were collected from farms, abattoirs and retailers by the Halal Meat Committee in the UK.^[32] Travel distances were estimated between farms and abattoirs and between abattoirs and retailers using the Google map. In case study A,

London-South West area was considered, it includes five farms, six abattoirs and eleven retailers. In case study B, London-South East area was considered. It includes five farms, six abattoirs and three retailers.

Table 4
Collected data from the HMC.

Case A / London – South West			
$I = 5$	$C_j^{E,\beta} = 4K-7.5K$	$D_k^\gamma = 50-100$	$d_{ij}^u = 23- 410$
$J = 6$	$C_j^{L,\beta} = 700-1.2K$	$P_{ij}^u = 0.85-0.98$	$d_{jk}^v = 110 -174$
$K = 11$	$S_i^\alpha = 1.2K-2.5K$	$P_{jk}^v = 0.85-100$	$W = 100$
$C_i^{E,\alpha} = 4K-8K$	$S_j^\beta = 1K-1.8K$	$R_i^\alpha = 30-100$	
$C_i^{L,\alpha} = 400-800$	$D_j^\beta = 300-1.5K$	$R_i^\beta = 15-100$	
Case B / London – South East			
$I = 5$	$C_j^{E,\beta} = 4K-7.5K$	$D_k^\gamma = 100-200$	$d_{ij}^u = 23- 400$
$J = 6$	$C_j^{L,\beta} = 700-1.2K$	$P_{ij}^u = 0.90-0.98$	$d_{jk}^v = 110 - 162$
$K = 3$	$S_i^\alpha = 1.2K-2.5K$	$P_{jk}^v = 0.85-100$	$W = 100$
$C_i^{E,\alpha} = 4K-8K$	$S_j^\beta = 1K-1.8K$	$R_i^\alpha = 60$	
$C_i^{L,\alpha} = 400-800$	$D_j^\beta = 600-1.5K$	$R_i^\beta = 40$	

In this work, LINGO¹¹ was used for computing results aiming to seek optimization solutions. Table 5 shows outputs of Pareto solutions which were obtained by assigning varying weight values to each objective for case study A and B, respectively. These solutions are associated with allocations of farms, abattoirs and retailers that need to be

opened for a specified supply chain network. These results, however, were obtained by assigning seven sets of three varying values in weights to the three objectives.

Table 5
Computational results for cases A and B respectively.

Solution number	Weights of objectives (Z_1, Z_2, Z_3)	Min Z_1 (GBP)	Max Z_2 (Items)	Max Z_3 (GBP)	Farms open	Abattoirs open	Iterations number
Case A							
1	1,0,0	279922	137952	559000	1, 3, 4, 5	1, 3, 4, 5, 6	2543
2	0.9,0.05,0.05	279922	137952	559000	1, 3, 4, 5	1, 3, 4, 5, 6	2611
3	0.8,0.1,0.1	279922	137952	559000	1, 3, 5	1, 3, 4, 5, 6	2344
4	0.7,0.15,0.15	305260	296576	559000	1, 3, 4, 5	1, 2, 3, 5, 6	6911
5	0.6,0.2,0.2	308076	307475	559000	2, 3, 4, 5	2, 3, 5, 6	1712
6	0.5,0.25,0.25	494596	309232	679960	2, 3, 4, 5	2, 3, 5, 6	136
7	0.4,0.3,0.3	459858	311230	690260	1, 2, 4, 5	1, 2, 3, 4, 5	130
Case B							
1	1,0,0	90480	93151	210000	1, 5	4, 6	819
2	0.9,0.05,0.05	90480	93151	210000	1, 5	4, 6	2459
3	0.8,0.1,0.1	103290	212015	210000	1, 5	5, 6	28223
4	0.7,0.15,0.15	121770	253107	306000	1, 5	5, 6	616
5	0.6,0.2,0.2	127352	109776	272280	1, 4, 5	4, 5	2415
6	0.5,0.25,0.25	128253	4506	252000	1, 4	1	2070
7	0.4,0.3,0.3	383029	74206	436500	1, 2, 3, 5	1, 2, 5, 6	5865

By analyzing the obtained solutions, the objectives (by minimizing the total investment cost, maximizing the Halal meat integrity and maximizing ROI) are conflicting objectives, i.e., maximizing or minimizing one objective value may lead to an increase of undesired values of other one or two objectives. As an example, a maximal integrity number of Halal meat products and a maximal ROI may result in an increase of the undesired value which is total investment cost. A pairwise comparison among the three conflicting objectives for case A is illustrated in Figure 5. The result shown in Figure 5 (a) indicates that decision makers do not need to invest more than 305,076 GBP on the RFID-based monitoring HMSC network as it will only lead to a slight increase the number of Halal meat products. By comparison, the computed result shown in Figure 5 (b) indicates that decision makers need not to invest more than 459,858 GBP to achieve a maximal ROI of 690,260 GBP, i.e., a further increase in the total investment cost from 459,858 GBP to 494,596 GBP will not lead to an increase but a slight decrease of ROI. This result proves that the maximum total investment cost does not necessarily lead to a maximal ROI. The result shown in Figure 5 (c) indicates a maximal number of Halal meat products (311,230 items) that yields a maximal ROI of 690,260 GBP.


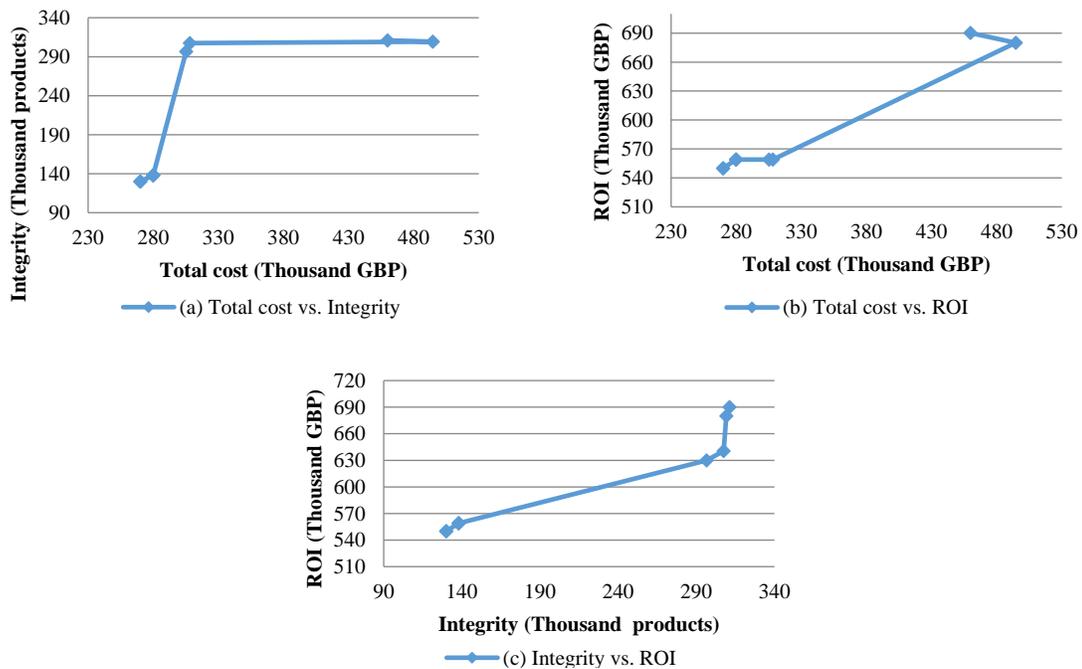


Fig. 5. A Pairwise comparison among the three objectives for case A.

In practice, one of these solutions must be selected by preferences of decision makers or using a decision making algorithm. To this aim, the developed decision making algorithm was utilized. Accordingly, solution three is the best solution for case A and solution two is the best solution for case B. It is noted that solution three for case study A generates a maximal ROI of 559,000 GBP, a maximal integrity number of 137,952 items and a minimal total investment cost of 279,922 GBP; it gives three farms and five abattoirs that need to be opened for the specified HMSC network. The result for solution two for case study B gives a maximal ROI of 210,000 GBP, a maximal integrity number of 93,151 items and a minimal total investment cost of 90,480 GBP, which suggests two farms and two abattoirs that need to be opened for the specified HMSC network.

Finally, Figure 6 shows the selected optimal design of HMSC networks that were obtained by setting up weight values (0.8, 0.1, 0.1) for case study A (solution three in Tables 5) and (0.9, 0.05, 0.05) for case study B (solution two in Tables 5). The geographic configuration shows locations of farms, abattoirs and retailers which need to be established for the proposed RFID-based HMSC network design. For instance, solution three for case study A suggests that the HMSC network needs three farms located in Warwickshire, Leicestershire and Yorkshire, respectively, and five abattoirs located in Birmingham, Balham, West Midland, Warrick and Norfolk, respectively. These abattoirs supply Halal meat products to eleven retailers. Solution two for case study B suggests the HMSC network needs two farms located in Lancashire and Warwickshire, respectively, and two abattoirs located in Balham and West Midland, respectively. These abattoirs supply Halal meat products to three retailers.

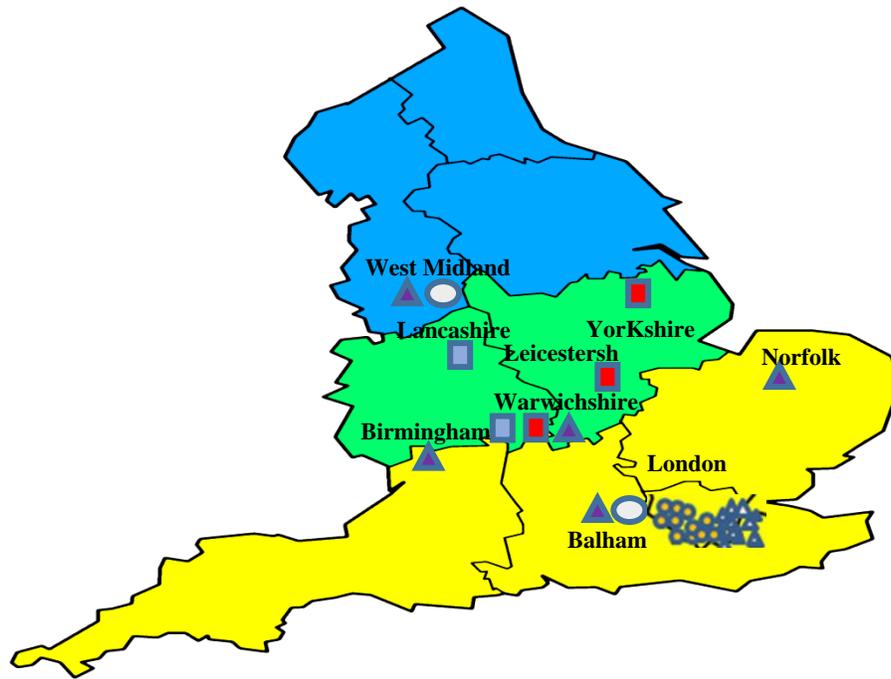

Facilities legend:

	Farms	Abattoirs	Retailers
Case A			
Case B			

Fig. 6. Architecture of the proposed RFID-based monitoring HMSC network.

CONCLUSIONS

A study by Wang,^[33] suggested that RFID implementation is a trend for future generation automated warehouses in logistics and supply chain sectors. This paper presents a feasibility study by examining a proposed RFID-based monitoring process that enhances the integrity of HMSCs using the multi-objective approach. This includes a framework of an RFID-based monitoring system that collects relatively accurate and real-time information data in order to improve traceability of Halal meat products in each process in production and transportation sectors. Retailers and consumers can also check information of Halal meat products in terms of Halal meat integrity online or using mobile phones. A

multi-objective mathematical model was developed as an aid for a trade-off decision making process in design of the proposed RFID-enabled HMSC network. Subsequently, a solution methodology was developed including a solution approach to obtain Pareto solutions and a decision making algorithm to select the best Pareto solution. Based on the computed results, the proposed system is economically feasible as a relatively high profit can be possibly obtained.

REFERENCES

1. Bosona, T., and Gebresenbet, G., 2013. Food traceability as an integral part of logistics management in food and agricultural supply chain. *Food Control* 33 (1), 32-48.
2. Zulfakar, M.H., Jie, F. and Chan, C., 2012. Halal Food Supply Chain Integrity: From A Literature Review To A Conceptual Framework. RMIT University Paper, 1-23.
3. Lodhi, A., 2009. Understanding Halal Food Supply Chain. London: HFRC UK Ltd; First edition.
4. Mansor, M.A., Shah Baki, S.-R.M., Tahir, N.M. and Rahman, R.A., 2013. An Approach of Halal Poultry Meat Comparison Based on Mean-Shift Segmentation. *IEEE Conference on Systems, Process & Control (ICSPC2013)*. Kuala Lumpur, Malaysia: **13-15 December** 2013, 279 - 282.
5. Junaini, S.N. and Abdullah, S., 2008. MyMobiHalal 2.0: Malaysian Mobile Halal Product Verification using Camera Phone Barcode Scanning and MMS. *International Conference on Computer and Communication Engineering*. Kuala Lumpur, Malaysia: **10-12 June 2008** 528 - 532.
6. Shanahan, C., Kernan, B., Ayalew, G., McDonnell, K., Butler, F., & Ward, S., 2009. A framework for beef traceability from farm to slaughter using global standards: an Irish perspective. *Computers and Electronics in Agriculture* 66 (1), 62-69.
7. Kassim, M., Haroswati, C., Yahayal, C.H., Hafiz, M. and Zaharuddin, M., 2012. A Prototype of Halal Product Recognition System. *International Conference on Computer & Information Science (ICCIS)*. Kuala Lumpur, Malaysia: 12-14 June 2012, 990 - 994.

8. Bahrudin, S.M.M., Illyas, M.I. and Desa, M.I., 2011. Tracking and Tracing Technology for Halal Product Integrity over the Supply Chain. International Conference on Electrical Engineering and Informatics. Bandung, Indonesia: IEEE, **11-13 July 2011**, H1 -2.
9. Feng, J., Fu, Z., Wang, Z., Xu, M. and Zhang, X., 2013. Development and evaluation on a RFID-based traceability system for cattle/beef quality safety in China. *Food Control* 31 (2), 314-325.
10. Bowling, M. B., Pendell, D. L., Morris, D. L., Yoon, Y., Katoh, K. and Belk, K. E., 2008. Review: identification and traceability of cattle in selected countries outside of North America. *The Professional Animal Scientist* 24, 287-294.
11. Kang, R. J., Zhang, X. S., Fu, Z. T. and Mu, W. S., 2010. Method of traceability information acquisition and transmission for beef cattle sector based on PDA and FSM. *Nongye Gongcheng Xuebao/Transactions of the Chinese Society of Agricultural Engineering* 26 (1), 227-231.
12. Shi, L., Fu, Z. T., and Zhang, L. X., 2010. An RFID-based traceability system for quality insurance of beef cattle breeding. *Computer Applications and Software* 27 (1), 40-43.
13. Lu, G. M., Zhang, X. S., Mu, W. S., Fu, Z. T., and Zhang, J., 2009. Method of quality traceability data acquisition and transmission for beef processing. *Computer Engineering and Design* 30 (15), 3657-3659.
14. Lu, G. M., Zhang, X. S., Mu, W. S., Fu, Z. T. and Zhang, J., 2010. Implementation of traceability system for beef processing based on web multilayer structure. *Computer Applications and Software* 27 (1), 20-22.
15. Expósito, I., Gay-Fernández, J.A. and Cuiñas, I., 2013. A Complete Traceability System for a Wine Supply Chain Using Radio-Frequency Identification and Wireless Sensor Networks. *IEEE Antennas and Propagation Magazine* 55 (2), 255 - 267.
16. Barge, P., Gay, P., Merlino, V. and Tortia, C., 2014. Item-level Radio-Frequency Identification for the traceability of food products: Application on a dairy product. *Journal of Food Engineering* 125, 119–130.
17. Hsu, C.I. and Liu, K.P., 2011. A model for facilities planning for multi-temperature joint distribution system. *Food Control* 22 (12), 1873–1882.

18. Hsu, Y.-C., Chen, A.-P. and Wang, C.-H., 2008. A RFID-enabled traceability system for the supply chain of live fish. IEEE International Conference on Automation and Logistics. Qingdao, China: IEEE, **1-3 Sept. 2008**, 81-86.
19. Abada, E., Palaciob, P., Nuinc, N., González de Záratec, A., Juarrosa, A., Gómezb, J.M. and Marco, S., 2009. RFID smart tag for traceability and cold chain monitoring of foods: Demonstration in an intercontinental fresh fish logistic chain. *Journal of Food Engineering* 93 (4), 394–399.
20. Trebar, M., Grah, A., Melcon, A.A. and Parreno, A., 2011. Towards RFID Traceability Systems of Farmed Fish Supply Chain. *Software, Telecommunications and Computer Networks (SoftCOM)*. Split: IEEE, 1 - 6.
21. Sun, C., Li, W.-Y., Zhou, C., Li, M. and Yang, X.-T., 2013. Anti-counterfeit system for agricultural product origin labeling based on GPS data and encrypted Chinese-sensible Code. *Computers and Electronics in Agriculture* 92, 82–91.
22. Jedermann, R., Behrens, C., Westphal, D. and Langa, W., 2006. Applying autonomous sensor systems in logistics—Combining sensor networks, RFIDs and software agents. *Sensors and Actuators A: Physical*, **123 (1)**, 370–375.
23. Zhang, J., Liu, L., Mu, M., Moga, L.M., and Zhang, X., 2009. Development of temperature-managed traceability system for frozen and chilled food during storage and transportation. *Food, Agriculture and Environment* 7 (3&4), 28-31.
24. Chen, Y.-Y., Wang, Y.-J. and Jan, J.-K., 2014. A novel deployment of smart cold chain system using 2G-RFID-Sys. *Journal of Food Engineering* 141, 113–121.
25. Wang, L., Kwok, S.K. and Ip, W.H., 2010. A radio frequency identification and sensor-based system for the transportation of food. *Journal of Food Engineering* 101 (1), 120–129
26. Academy, Islamic Fiqh, July 1999, Available: <<http://ar.islamway.net/fatwa/28033/>>. (accessed October 26, 2014).
27. Lomiwe, D., Farouk, M., Frost, D.A., Dobie, P.M and Young, Q.A., 2010. The Biochemical Basis in Trendiness in Beef. A PhD project, Hamilton, New eland: Food & Bio-based Product Group, n.d.
28. Amin, S. and Zhang, G., 2013. A multi-objective facility location model for closed-loop supply chain network under uncertain demand and return. *Applied Mathematical Modelling* 37 (6), 4165–4176.

29. Kannan, G., Sasikumar, P. & Devika, K., 2010. A genetic algorithm approach for solving a closed loop supply chain model: a case of battery recycling, *Applied Mathematical Modelling* 34 (3), 655–670.
30. Lee, D. & Dong, M., 2009. Dynamic network design for reverse logistics operations under uncertainty. *Transport. Research Part E: **Logistics and Transportation Review*** 45(1), 61–71.
31. Pishvaei, M. S & Razmi, J., 2012. Environmental supply chain network design using multi-objective fuzzy mathematical programming. *Applied Mathematical Modelling* 36 (8), 3433–3446.
32. HMC, (UK), 2012. <http://www.halalhmc.org/>, Available: <<http://www.halalhmc.org/test-demo.htm>>. (accessed October 26, 2014).
33. Wang, Q., McIntosh, R., Brain, B. 2010, A new-generation automated warehousing capability”, *International Journal of Computer Integrated Manufacturing*, 23 (6): 565–573.